




# UGY275CKS

## UNIVPOWER SILENT SERIES

### POWER OUTPUT

Prime Rating — 220 kW (275 kVA)  
 Standby Rating — 242 kW (300 kVA)  
 3-Phase, 50 Hertz, 0.8 PF

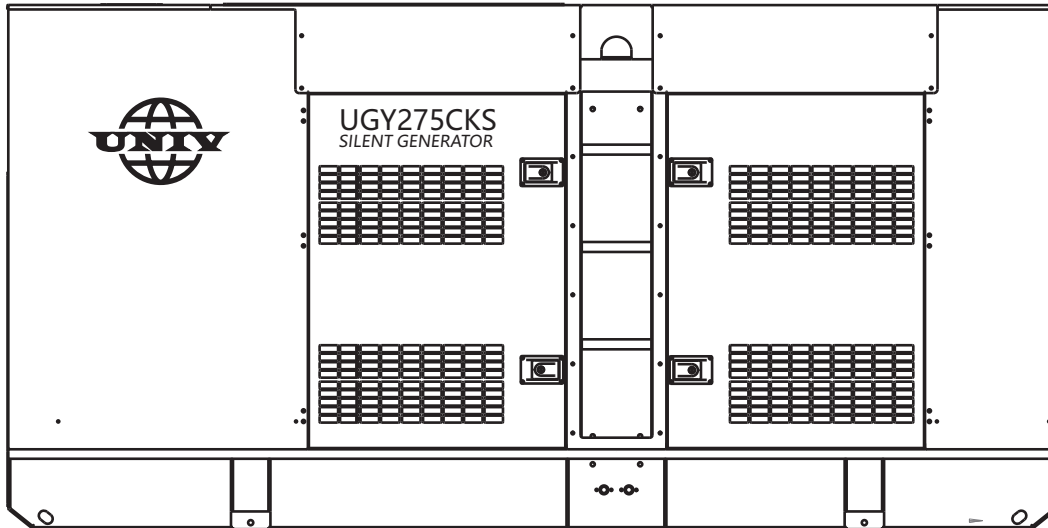

### STANDARD FEATURES

- Heavy duty, 4-cycle, variable speed fan, diesel engine provides maximum reliability.
- Brushless alternator reduces service and maintenance requirements. Class H protection.
  - Open delta alternator design provides virtually unlimited excitation for maximum motor starting capability.
  - Automatic voltage regulator (AVR) provides precise regulation.
- Electronic governor system maintains frequency to  $\pm 0.25\%$ .
- Full load acceptance of standby nameplate rating in one step
- Soundproof, weather resistant, steel housing provides operation at 78dB (A) at 7meters. Fully lockable enclosure allows safety operation. Outdoor operation available.
- Internal fuel tank with direct observing glass, and fuel level meter display on control panel  
E-coat and powder coat paint provides durability and weather protection.
- Digital engine gauges including oil pressure, water temperature, battery volts, engine speed, and fuel level.
- Analog generator instrumentation including Ampere meter,
- Voltage meter, frequency meter, ammeter phase selector switch, voltmeter phase selector switch. Analog generator instrumentation and regulator adjustment.
- Deepsea/Comap professional generator controller.
  - High visibility LCD display with heated screen and alphanumeric readout.
  - IP65 Protection standard, operational temperature range of -40° to 85° C.
  - Modbus interface for gauge panel and expansion options.
  - DPF cleaningcycle indication.
  - Log record for inspection
- Automatic safety shutdown system monitors the water temperature, engine oil pressure, low coolant, low DEF, overspeed, and overcrank. Warning lights indicate abnormal conditions.
- Fuel/water separator. Removes condensation from fuel for extended engine life.
- Emergency stop switch — when manually activated, shuts down in any emergency.

### UNIVPOWER SILENT SERIES


#### UNIV POWER DECIBELLEVELS

Revolving field, self ventilated weatherproof Normal conversation allows substantially lower operating noise levels than competitive designs. UNIVGensets good for home, construction sites, residential, hospital, etc.

- 90 — Subway / truck traffic
- 80 — Average city traffic
- 70 — Inside car at 60 mph
- 60 — Air conditioner at 6m
- 50 — Normal conversation

**78.0**  
DECIBELS

### GENERATOR OUTPUT PANEL

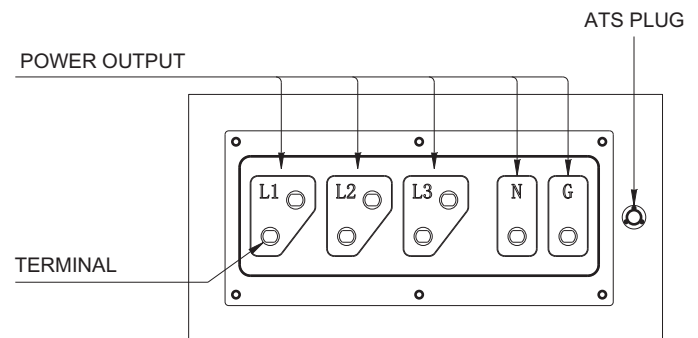



# UGY275CKS

## UNIVPOWER SILENT SERIES

### SPECIFICATIONS

Generator Specifications	
Model	Revolving field, self-ventilated weatherproof
Armature Connection	Star with Neutral
Phase	3
Standby Output	242KW (300KVA)
Prime Output	220KW (275 KVA)
Power Factor	0.8
Voltage Regulation (No load to full load)	±0.5%
Generator RPM	1500
Frequency	50 Hz
No. of Poles	4
Excitation	Brushless with AVR
Frequency Regulation: No Load to Full Load	Isochronous under varying loads from no load to 100% rated load
Frequency Regulation: Steady State	±0.25% of mean value for constant loads from no load to full load.
Insulation	Class H
Sound Level dB(A) Full load at 7M	78

Amperage	
Rated Voltage	Maximum Amps
3Ø Volt 220/380	418 Amps
3Ø Volt 230/400	397 Amps
Main Line Circuit Breaker Rating	630 Amps
Over Current Relay Trip Set Point 400V Mode Only	693 Amps

Fuel System	
Maximum Fuel Flow (per hour)	26.4 gallons (100 liters)
Fuel Tank Capacity	105.6 gallons (400 liters)
Fuel Consumption	L / h
At full load	61.7
At 3/4 load	46.7
At 1/2 load	31.8
At 1/4 load	17.3

Control system	
Controller Brand	Deepsea
Model	DSE4520
Module	Manual/Auto start/stop module
Standard function	Engine control
	Generator monitoring
	Generator protection
	Specification
Display	Frequency
	Battery voltage
	Running hour
Warning/shutdown	under/over voltage
	under/over speed
	under/over frequency
	Low oil pressure
	High water temperature
Communication port	USB

Engine Specifications	
Make / Model	Cummins / NTA855-G1A
Emissions	/
Starting System	Electric
Design	4-cycle, water cooled, direct injection, Turbo charged
Displacement	14 liters
No. cylinders	6
Bore x Stroke	140 x 152 mm
Gross Engine Power Output	390 hp (291 kW)
Compression Ratio	14.5 : 1
Engine Speed	1500 rpm
Overspeed Limit	1725 rpm
Oil Capacity	10.2 gallons (38.6 liters)
Coolant Capacity	22.46 gallons (85 liters)
Battery	24V 100Ah x 2

Alternator	
Alternator Brand	Stamford/Mecc alte/Kwise
Alternator Model	S4L1D-D/ECO38 2L4A/S314G220D2
Excitation	Brushless, Self-Excited system
Capacity(KVA)	300kva
Power(KW)	240kw
Efficiency(%)	90%
Insulation class	Class H
Protection class	Ip23
Steady state voltage regulation	±1%
Voltage control	AVR

### WARRANTY\*

#### Generator

12 months from date of purchase or 1000 hours (whichever occurs first).


### NOTICE

Enough Air flow is extremely important to Generator operation. Improper connection can cause electrocution and/or property damage. Do not connect to any electrical system except through an approved device. Specifications are subject to change without notice.




# UGY275CKS

## UNIVPOWER SILENT SERIES

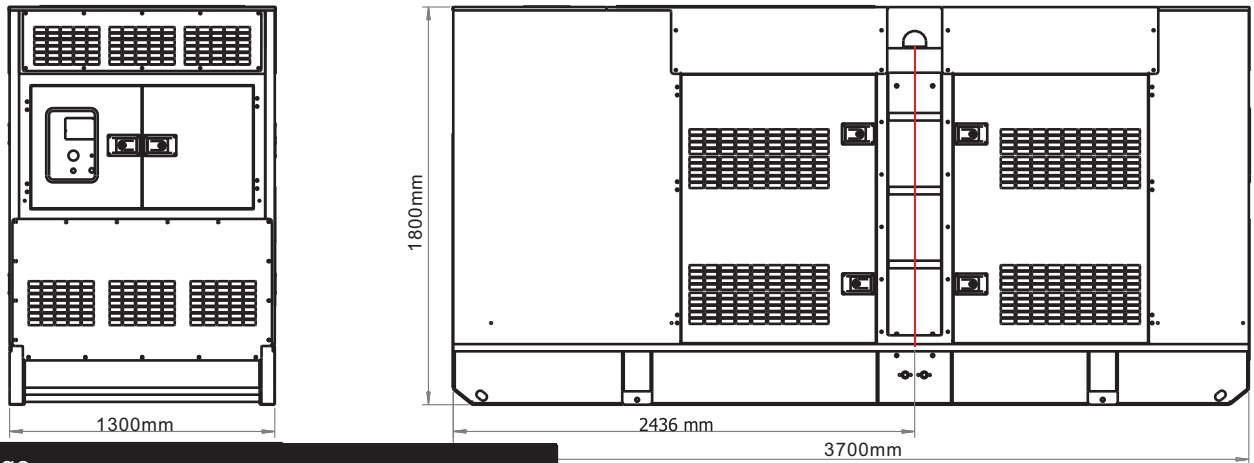

Amperage	
Rated Voltage	Maximum Amps
3Ø Volt 220/380	228 Amps
3Ø Volt 230/400	216.5 Amps
Main Line Circuit Breaker Rating	400 Amps
Over Current Relay Trip Set Point 400V Mode Only	440 Amps

Weight	
Dry Weight	3,500 kg
Wet Weight	3,900 kg
Max. Lifting Point capacity	8,600 kg

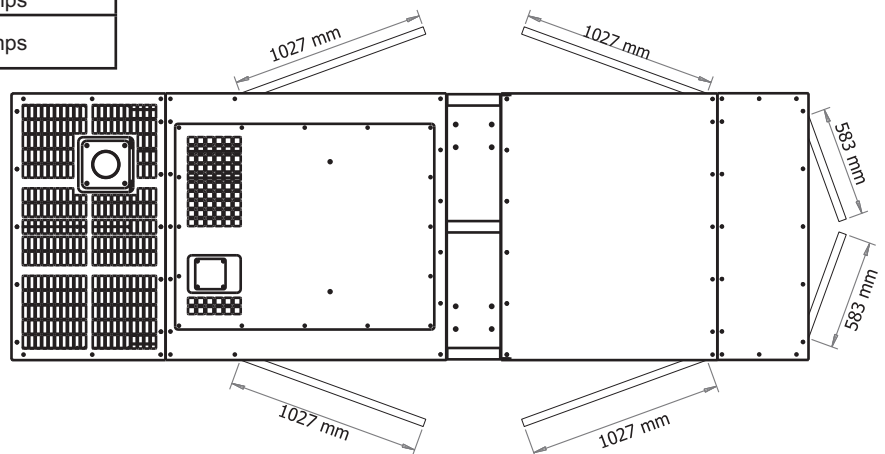

Manufactured by  
**Zhejiang Universal Machinery Co.,Ltd**  
 Add:No 18-9 Nanshan Road, Qujiang Zone,  
 Quzhou city, Zhejiang Province, CN  
 Tel:0086-570-3377022/3377023  
 Fax:0086-570-3377086  
 Website:www.univpower.com