


POWER OUTPUT


Prime Rating — 15 kW (18.75 kVA) Standby Rating — 18kW (22.5kVA) 1-Phase, 60 Hertz, 0.8 PF

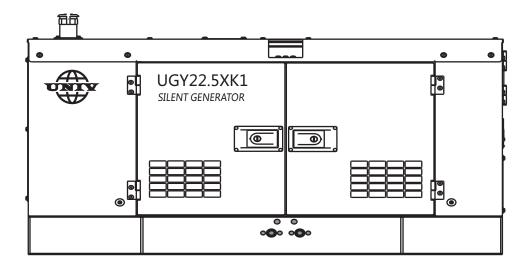


STANDARD FEATURES

- Heavy duty, 4-cycle, variable speed fan, diesel engine provides maximum reliability.
- Brushless alternator reduces service and maintenance requirements. Class H protection.
- Open delta alternator design provides virtually unlimited excitation for maximum motor starting capability.
- Automatic voltage regulator (AVR) provides precise regulation.
- Electronic governor system maintains frequency to ±0.25%.
- Full load acceptance of standby nameplate rating in one step
- Soundproof, weather resistant, steel housing provides operation at 65dB (A) at 7meters. Fully lockable enclosure allows safety operation. Outdoor operation available.
- Internal fuel tank with direct observing glass, and fuel level meter display on control panel
 E-coat and powder coat paint provides durability and weather protection.
- Digital engine gauges including oil pressure, water temperature, battery volts, engine speed, and fuel level.
- Analog generator instrumentation including Ampere meter,
- Voltage meter, frequency meter, ammeter phase selector switch, voltmeter phase selector switch. Analog generator instrumentation and regulator adjustment.
- Deepsea/Comap professional generator controller.
 High visibility LCD display with heated screen and alphanumeric readout.
 - IP65 Protection standard, operational temperature range of-=40° to 85° C.
- Modbus interface for gauge panel and expansion options.
- DPF cleaningcycle indication.
- Log record for inspection
- Automatic safety shutdown system monitors the water temperature,engine oil pressure, low coolant, low DEF, overspeed, and overcrank. Warning lights indicate abnormal conditions.
- Fuel/water separator. Removes condensation from fuel for extended engine life.
- Emergency stop switch when manually activated, shuts down in any emergency.

UNIVPOWER SILENT SERIES

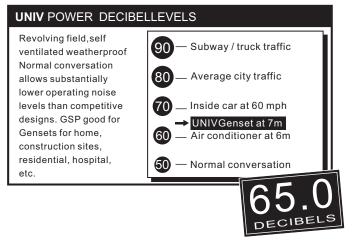

GENERATOR OUTPUT PANEL

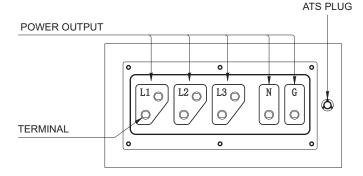



SPECIFICATIONS

| Generator Specifications | |
|---|---|
| Model | evolving field, self-ventilated weatherproof |
| Armature Connection | Star with Neutral |
| Phase | 1 |
| Standby Output | 18 KW (22.5KVA) |
| Prime Output | 15 KW (18.5 KVA) |
| Power Factor | 0.8 |
| Voltage Regulation (No load to full load) | ±0.5% |
| Generator RPM | 1800 |
| Frequency | 60 Hz |
| No. of Poles | 4 |
| Excitation | Brushless with AVR |
| Frequency Regulation: No Load to Full Load | Isochronous under varying loads from no load to 100% rated load |
| Frequency Regulation: Steady State | 0.25% o f mean value for constant loads from no load to full load. |
| Insulation | Class H |
| Sound Level dB(A) Full load at 7M | 65 |

| Amperage | |
|--|--------------|
| Rated Voltage | Maximum Amps |
| 1Ø Volt 110/220 | 102.3 Amps |
| Main Line Circuit Breaker Rating | 125 Amps |
| Over Current Relay Trip Set Point 220V Mode | 138 Amps |

| Engine Specifications | |
|---------------------------|---|
| Make / Model | FAW/ 4DW81-28D |
| Emissions | / |
| Starting System | Electrical start |
| Design | 4 cylinder ,4-cycle, water cooled, direct injection, natural intake |
| Displacement | 2.27 Lliters |
| No. cylinders | 4 |
| Bore x Stroke | 85*100mm |
| Gross Engine Power Output | 29.5hp (22 kW) |
| Compression Ratio | 17:1 |
| Engine Speed | 1800 rpm |
| Overspeed Limit | 2070 rpm |
| Oil Capacity | 2.88 gallons (10.9 liters) |
| Coolant Capacity | 5.55 gallons (21 liters) |
| Battery | 12V 60Ah x 1 |

| Alternator | |
|---------------------------------|-------------------------------|
| Alternator Brand | KWISE |
| Alternator Model | S184G16C6 |
| Excitation | Brushless,Self-Excited system |
| Capacity(KVA) | 24 kva |
| Power(KW) | 19.2 kw |
| Efficiency(%) | 82% |
| Insullation class | Class H |
| Protection class | lp23 |
| Steady state voltage regulation | ±1% |
| Voltage control | AVR |

Generator

12 months from date of purchase or 1000 running hours (whichever occurs f


NOTICE


| Enough Air flow is extremely important to |
|--|
| Generator operation. |
| Improper connection can cause electrocution |
| and/or property damage. |
| Do not connect to any electrical system except |
| through an approved device. |
| Specifications are subject to change without |
| notice. |

| Fuel System | |
|------------------------------|--------------------------|
| Maximum Fuel Flow (per hour) | 1.85 gallons (7 liters) |
| Fuel Tank Capacity | 14.8 gallons (56 liters) |
| Fuel Consumption | L/h |
| At full load | 5.5 |
| At 3/4 load | 3.8 |
| At 1/2 load | 3.1 |
| At 1/4 load | 2.3 |


| Control system | |
|--------------------|-------------------------------|
| Controller Brand | SmartGen |
| Model | HGM420N |
| Module | Manual/Auto start/stop module |
| Standard function | Engine control |
| | Generator monitoring |
| | Generator protection |
| | Specification |
| Display | Frequency |
| | Battery voltage |
| | Running hour |
| Warning/shutdown | under/over voltage |
| | under/over speed |
| | under/over frequency |
| | Low oil pressure |
| | High water temperature |
| Communication port | USB |



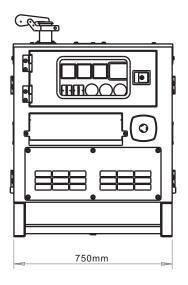

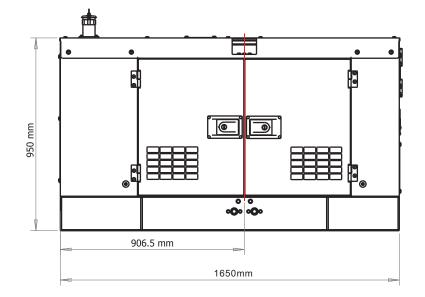

| Weight | |
|--------------------------------|----------|
| Dry Weight | 600 kg |
| Wet Weight | 656 kg |
| Max. Lifting Point Capacity | 1,312 kg |

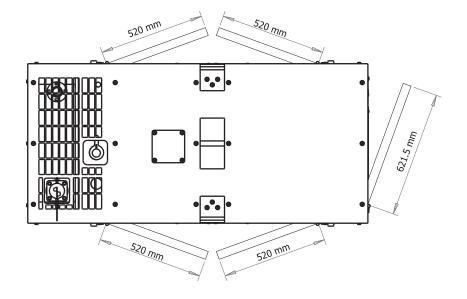

Manufacturered by **Zhejiang Universal Machinery Co.,Ltd** Add:No 18-9 Nanshan Road, Qujiang Zone, Quzhou city, Zhejiang Province, CN Tel:0086-570-3377085 Fax:0086-570-3377086 Website:www.univpower.com